

Memoright GTRS-18/GTS-18 Series
1.8” Form Factor
NAND Flash Solid State Drive
Model Code: MRSAJ6P*****18*00

Product Specification

Preliminary Version

Overview

This document serves as reference basis for GTRS-18/GTS-18 Series Solid State Drive's technical characteristics to help you to choose Memoright industrial operating temperature range SLC NAND Flash solution.

Memoright Confidential

INFORMATION IN THIS DOCUMENT IS PROVIDED IN RELATION TO MEMORIGHT PRODUCTS, AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

NOTHING IN THIS DOCUMENT SHALL BE CONSTRUED AS GRANTING ANY LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IN MEMORIGHT PRODUCTS OR TECHNOLOGY.

ALL INFORMATION IN THIS DOCUMENT IS PROVIDED ON AS "AS IS" BASIS WITHOUT GUARANTEE OR WARRANTY OF ANY KIND.

For updates or additional information about Memoright products, contact your nearest Memoright office.

Memoright products are not intended for use in life support, critical care, medical, safety equipment, or similar applications where products failure could result in loss of life or personal or physical harm, or any military or defense application, or any governmental procurement to which special terms or provisions may apply.

Copyright © 2012 by Memoright Corporation. All rights reserved.

Information contained in this document, including but not limited to any instructions, descriptions and product specifications, is proprietary to Memoright and shall not be modified, used, copied, reproduced or disclosed in whole or in part, in any form or by any means, electronic or mechanical, for any purpose, without the written consent of Memoright Corporation.


Ordering information

Product code

Memoright GTRS-18/GTS-18 Series	
Part Number	Description
MRSAJ6P032GN218I00	32 GB SLC NAND Flash, SATA II, 1.8" SSD, Industrial Solution
MRSAJ6P064GN218I00	64 GB SLC NAND Flash, SATA II, 1.8" SSD, Industrial Solution
MRSAJ6P128GN418I00	128 GB SLC NAND Flash, SATA II, 1.8" SSD, Industrial Solution
MRSAJ6P256GN518I00	256 GB SLC NAND Flash, SATA II, 1.8" SSD, Industrial Solution
MRSAJ6P032GN718C00	32 GB SLC NAND Flash, SATA II, 1.8" SSD, Commercial Solution
MRSAJ6P064GN718C00	64 GB SLC NAND Flash, SATA II, 1.8" SSD, Commercial Solution
MRSAJ6P128GN918C00	128 GB SLC NAND Flash, SATA II, 1.8" SSD, Commercial Solution
MRSAJ6P256GN018C00	256 GB SLC NAND Flash, SATA II, 1.8" SSD, Commercial Solution

For the latest ordering information, please consult Memoright sales representatives or check on our website: <http://www.memoright.com>

Decoder

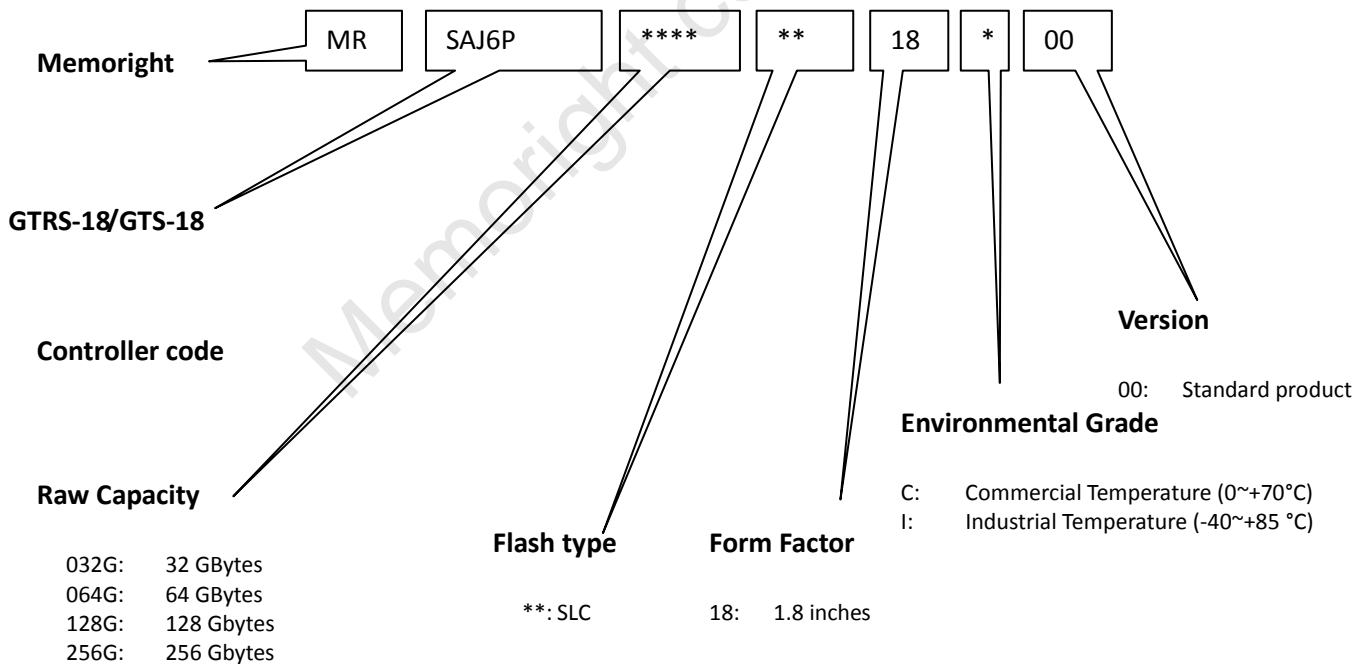

Content

Overview	1	<i>Functional Block Diagram</i>	8
Ordering information	3	<i>Physical specifications</i>	9
<i>Product code</i>	3	<i>Drive Specifications</i>	10
<i>DecoderContent</i>	3	1.8 Physical organization	11
<i>Content</i>	4	1.9 Recording and interface technology	11
<i>List of Tables</i>	6	1.10 Physical characteristics	12
<i>List of Figures</i>	6	1.11 Access time	12
<i>General Description</i>	7	1.12 Power specifications	12
1.1 Raw capacity	7	1.12.1 Power consumption	12
1.2 Form Factor	7	1.12.2 Voltage tolerance	13
1.3 Host interface	7	1.13 Environmental specifications	13
1.4 Performance	7	1.13.1 Operating temperature	13
1.5 Reliability	7	1.14 Reliability	13
1.5.1 Wear Leveling	7	1.15 Agency certification	13
1.5.2 Endurance	7	1.16 Environmental protection	13
1.5.3 ECC	7	2 Configuring and mounting the drive ... 14	
1.5.4 Bad block management algorithm	7	2.1 Static discharge and handling precautions	14
1.5.5 Mean Time between Failures	7	2.2 Drive mounting	14
1.5.6 Data Retention	7	2.3 Installation considerations	14
1.6 Power consumption	7	3 SATA interface	15
1.7 Environmental	7	3.1 SATA interface signals and connector pins	15
1.7.1 Temperature	7	3.1.1 Signal Segment Pin-out Configuration	15
1.7.2 Shock	7	3.1.2 Power Segment Pin-out Configuration	16
1.7.3 Vibration	7	3.2 Supported ATA commands	17
1.7.4 Humidity	7		
1.7.5 Altitude	7		

Memoright GTRS-18/GTS-18 Series product specification

3.2.1	Recalibrate (10h)	17	3.2.17	Write Multiple (C5h)	19
3.2.2	Read Sector(s) (20h)	18	3.2.18	Set Multiple Mode (C6h)	19
3.2.3	Read Sector(s) EXT (24h)	18	3.2.19	Read DMA (C8h)	19
3.2.4	Read DMA EXT(25h)	18	3.2.20	Write DMA (CAh)	19
3.2.5	Read Multiple EXT(29h)	18	3.2.21	Standby Immediate (E0h) ...	19
3.2.6	Write Sector(s) (30h)	18	3.2.22	Idle immediate (E1h or 95h)	19
3.2.7	Write Sector(s) EXT(34h)	18	3.2.23	Standby (E2h)	20
3.2.8	Write DMA EXT(35h)	18	3.2.24	Idle (E3h)	20
3.2.9	Write Multiple EXT(39h)	18	3.2.25	Read Buffer (E4h)	20
3.2.10	Read/Verify Sector(s) (40h)	18	3.2.26	Check Power (E5h or 98h) ..	20
3.2.11	Read Verify Sector(s) EXT(42h)	18	3.2.27	Sleep (E6h)	20
3.2.12	Seek (70h)	18	3.2.28	Flush Cache (E7h)	20
3.2.13	Execute Device Diagnostic (90h)	19	3.2.29	Write Buffer (E8h)	20
3.2.14	Initialize Device Parameters (91h)	19	3.2.30	Flush CACHE EXT(EAh) ...20	
3.2.15	S.M.A.R.T (B0h)	19	3.2.31	Identity Device (ECh)	20
3.2.16	Read Multiple (C4h)	19	3.2.32	Set Features (EFh)	24
			3.2.33	Set Features command	24
			Sales and technical support		26

List of Tables

Table 1: Specifications Summary	10
Table 2: Products capacity	11
Table 3: Default logic geometry	11
Table 4: Physical organization	11
Table 3: Recording and interface	11
Table 4: Physical characteristics	12
Table 5: Power Consumption	12
Table 6: Ambient temperature	13
Table 7: SATA Connector Signal Definitions	15
Table 8: SATA Connector Power segment Definitions	16
Table 9: Supported ATA commands	17
Table 10: Drive-specific features	21
Table 11: Set features description	25

List of Figures

Figure 1: Block diagram	8
Figure 2: Dimension	9
Figure 3: SATA Pin	15

1. General Description

Memoright GTRS-18/GTS-18 Series Solid State Drive consists solely of semiconductor devices, with high reliability and high compatibility SLC NAND Flash.

As GTRS-18/GTS-18 Series SSD doesn't have any mechanical part such as platter (disk), motor and suspension, it gives a good solution in a UMPC, Tablet PC, Server for a storage device with high performance, low power consumption and small form factor. At the same time it provides ruggedized solutions for industrial use with an extreme environment and an increased MTBF.

For an easy adoption, the GTRS-18/GTS-18 Series has the same device interface and physical dimension with HDD.

1.1 Raw capacity

32, 64, 128,256 GBytes

1.2 Form Factor

1.8" (78.5 x 54 x 5)mm

1.3 Host interface

Serial ATA 2.6 specification compliant

1.4 Performance

Host Interface: 3.0Gbps
Sustained Read transfer: up to 255 MB/s
Sustained Write transfer: up to 200 MB/s
Access time: < 0.1ms
Random IOPS Read @4Kbytes: up to 12,000
Random IOPS Write @4Kbytes: up to 1,400

1.5 Reliability

1.5.1 Wear Leveling

Both dynamic and static wear leveling strategy, which ensures all blocks have nearly same wear level, reducing dependence of write endurance on access pattern.

1.5.2 Endurance

> 5 yrs sequential write (for one full drive's capacity write per day)

1.5.3 ECC

Enhanced ECC algorithm, which reduces error rate and enforces write endurance at same time. BCH-16 per sector(1K Bytes).

1.5.4 Bad block management algorithm

This drive has a certain number of reserved blocks. When a user data block fails, a reserved block will replace the failed block. The

replacement of bad block is transparent to user.

1.5.5 Mean Time between Failures

More than 4,000,000 hours

1.5.6 Data Retention

Data retention :>10 years
Test under room temperature.

1.6 Power consumption

Input voltage: +3.3VDC,
Input current : 2A Max.(Transient)
Read : 1.58W(Average)
Write : 2.17W(Average)
Idle : 0.55W(Average)
Test under room temperature @ 3.3V

1.7 Environmental

1.7.1 Temperature

Operating : -40°C ~ +85°C(I-Temp)
0°C ~ +70°C(C-Temp)
Non-Operating: -55°C ~ +95°C(I-Temp)
-40°C ~ +85°C(C-Temp)

1.7.2 Shock

Operating: 11ms @50G, Half Sine Wave
Non-Operating: 0.5ms@1500G, Half Sine Wave

1.7.3 Vibration

Operating: 16.4G Peak, 10~2000Hz, x3 Axis

1.7.4 Humidity


5~95% (Non-condensing)

1.7.5 Altitude

-1000~80,000 ft


1.8 Functional Block Diagram

Figure 1: Block diagram

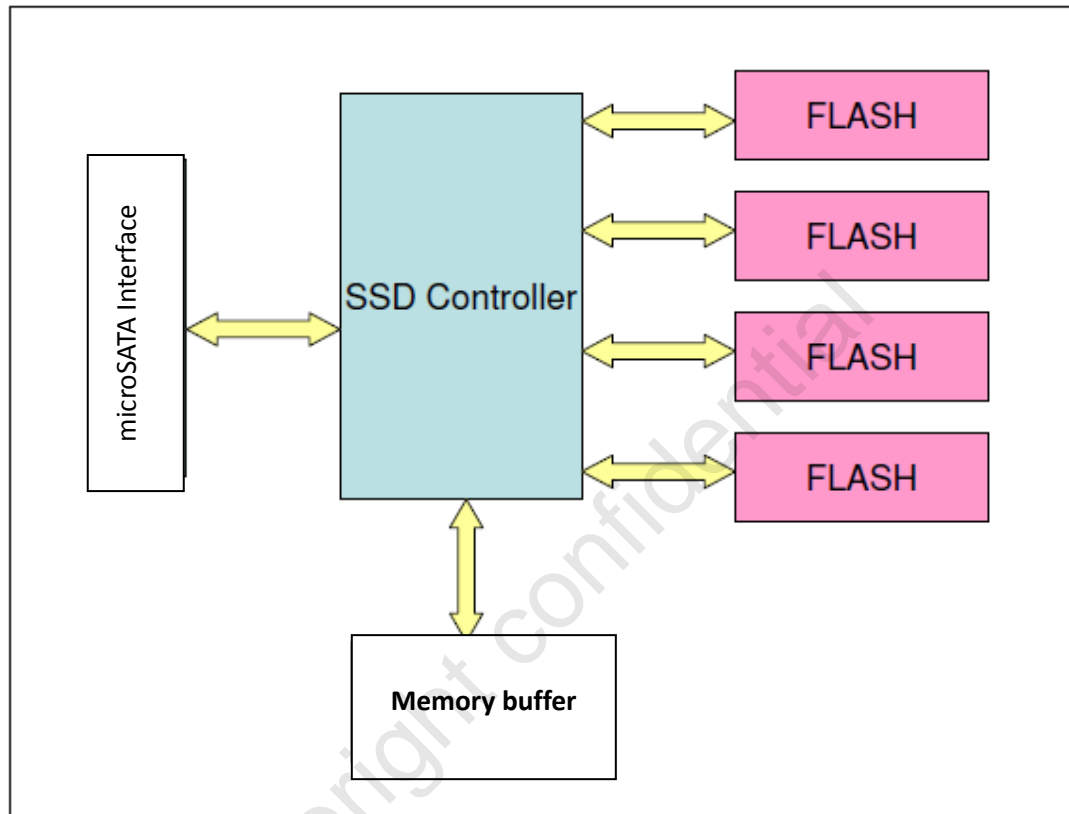

2. Physical specifications

Figure 2: Dimension

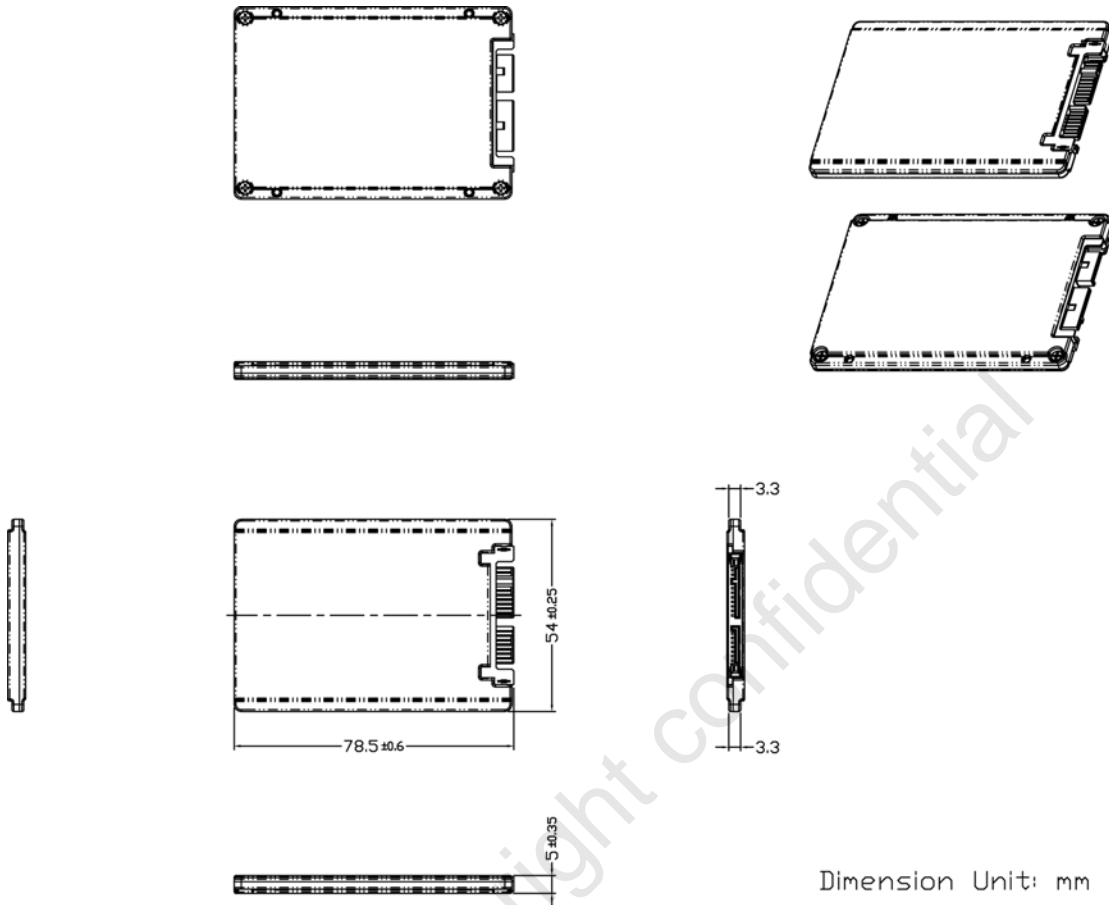

3. Drive Specifications

Unless otherwise noted, all specifications are measured under ambient conditions, at 25°C, and nominal power.

Specification Summary table

The specifications listed in the table below are for quick reference. For details on specification measurement or definition, see the appropriate section of this manual.

Table 1: Specifications Summary

Unformatted capacity	32 GB *	64 GB *	128 GB *	256 GB *
Max data transfer rate (read)	230 MB/s	230 MB/s	255 MB/s	255 MB/s
Max data transfer rate (write)	200 MB/s	200 MB/s	180 MB/s	180 MB/s
Channels	8			
Media type	Single Layer Cell (SLC) NAND Flash			
Max Random 4KBytes IOPS(read)	12,000	12,000	1,1000	1,1000
Max Random 4KBytes IOPS(write)	1,100	1,300	1,400	1,400
Interface	Serial ATA 2.0			
Cache buffer	64 Mbytes			
Height	5 mm			
width	54 mm			
Length	78.5 mm			
Average latency(Typical)	< 0.1 msec			
Sequential read power(Typical) **	1.05 W	1.67 W	1.68 W	2 W
Sequential write power (Typical)**	1.47 W	2.25 W	2.34 W	2.6 W
Idle mode power(Typical) **	0.33 W	0.48 W	0.66 W	1 W
Operating temperature	-45°C to +85°C (I-temp), 0°C to +70°C (C-temp),			
Humidity (non-condensing)	5%~95% (operating)			
Shock (Operating)	1000G (duration 0.5msec, Half Sine Wave)			
Shock (Non-Operating)	1500G (Duration 0.5msec, Half Sine Wave)			
Drive acoustics, sound power (dB)	0			
Non-recoverable read errors	< 10 ⁻¹⁶			
Mean Time Before Failure (MTBF)	> 4,000,000 hours			
Altitude	-1000~80,000(Ft)			

* 1GB = 1,000,000,000 Bytes

** typical value under room temperature

3.1 Unformatted capacity

Table 2: Products capacity

Model	Unformatted capacity	Guaranteed sectors	Bytes per sector
MRSAJ6P032G**18*00	32 GB	62,533,296	512
MRSAJ6P064G**18*00	64 GB	125,045,424	512
MRSAJ6P128G**18*00	128 GB	250,069,680	512
MRSAJ6P256G**18*00	256 GB	500,118,192	512

3.2 default logic geometry

Table 3: Default logic geometry

Model	Cylinders	Read/write heads	Sectors per track
MRSAJ6P032G**18*00	62037	16	63
MRSAJ6P064G**18*00	124053	16	63
MRSAJ6P128G**18*00	248085	16	63
MRSAJ6P256G**18*00	496149	16	63

LBA mode

When addressing these drives in LBA mode, all blocks (sectors) are consecutively numbered from 0 to n-1, where n is the number of guaranteed sectors as defined above.

3.3 Physical organization

Table 4: Physical organization

Channels
8

The number of channels means the maximum NAND flash units parallel involved in each host command execution.

3.4 Recording and interface technology

Table 5: Recording and interface

Technology	Specification
Interface	Serial ATA 2.0
Interface data transfer rate	3.0 Gbps
Recording media	Single Layer Cell(SLC) NAND flash

3.5 Physical characteristics

Table 6: Physical characteristics

Height	(mm)	5 mm
Width	(mm)	54 mm
Length	(mm)	78.5 mm

3.6 Access time

The time accessing to data in HDD equals to that the seek time plus the latency time, not including controller time overhead. But for SSD, the latency time is 0, and the seek time is very small. Most of the time is consumed by controller overhead.

The access time definition here is measured from the last byte of host command received by drive to the first data byte sent to host by drive in read operation.

3.7 Power specifications

The drive receives DC power (+3.3V) through the interface connector.

3.7.1 Power consumption

Power requirement for the drive is listed in the table. Typical power measurements are based on an average of drive testing, under nominal conditions, using 5.0V input voltage at room temperature.

- **Read power**

The read power is measured with three 63 sectors read operations every 100msecs.

The consecutive read power is measured with consecutive 128Kbytes read operations.

- **Write power**

The write power is measured with three 63 sectors write operations every 100msecs.

The consecutive write power is measured with consecutive 128Kbytes write operations.

- **Idle mode power**

The idle power is measured with no read/wrote operation.

Table 7: Power Consumption

Power mode	Power consumption (W) @+3.3V, Room Temp
Consecutive read	1.6
Consecutive write	2.17
Idle	0.62

3.7.2 Voltage tolerance

Voltage tolerance (including noise): 3.3 V \pm 5%

3.8 Environmental specifications

3.8.1 Operating temperature

Ambient temperature is defined as the temperature of the environment immediately surrounding the drive.

Above 1,000 feet (305 meters), the maximum temperature is decreased linearly by 1°C every 1000 feet.

Table 8: Ambient temperature

Operating	-40° to 85°C (I-temp)
	0° to 70°C (C-temp)
Non-operating	-55° to 95°C (I-temp)
	-40° to 85°C (C-temp)

3.9 Reliability

It's well known that the reliability of a chip configuration is better than a mechanical configuration. Because the mechanical configuration is affected by too many factors, it influences the reliability of HDD very much. While the chip configuration is opposite, it makes that GTRS-18/GTS-18 Series SSD has a nice reliability.

3.10 Agency certification

GTRS-18/GTS-18 Series SSD products have passed the following agency certification: FCC, CE,

3.11 Environmental protection

GTRS-18/GTS-18 Series SSD produces almost no quantity of heat and the noise is 0 dB when it is working. At the same time, the GTRS-18/GTS-18 Series SSD products and the enclosed components/devices and/or assemblies are lead-free. It has no influence on environment.

4 Configuring and mounting the drive

This section contains the specifications and the instructions for configuring and mounting the drive.

4.1 Static discharge and handling precautions

After unpacking and before installation, the drive may be exposed to potential handling and electrostatic discharge (ESD) hazards. Observe the following standard handling and static-discharge precautions:

Caution:

- Keep the drive in the electrostatic discharge (ESD) bag until you are ready to installation to limit the drive's exposure to ESD.
- Before handling the drive, put on a grounded wrist strap, or ground yourself frequently by touching the metal chassis of a computer that is plugged into a grounded outlet. Wear a grounded wrist strap throughout the entire installation procedure.
- Handle the drive only by its edges or frame.
- The drive is fragile, and handles it with care. Do not press down on the drive top cover.
- Always rest the drive on a padded, antistatic surface until you mount it in the computer.
- Do not touch the connector pins or the printed circuit board.
- Do not remove the factory-installed labels from the drive or cover them with additional labels. Removal voids the warranty. Some factory-installed labels contain information needed to service the drive. Other labels are used to seal out dirt and contamination.

4.2 Drive mounting

You can mount the drive using four screws in the side-mounting holes or four screws in the bottom-mounting holes. See Figure 2 for drive mounting dimensions (dimensions in inches with mm in parentheses). Follow these important mounting precautions when mounting the drive:

- Unpack the drive and keep it away from any potential ESD (Electrostatic Discharge) hazard area.
- Connect the drive to the 7+9 Pin SATA connector properly.
- Power on your host and then format the SSD or initiate the SSD through the RAID card with the standard drive format procedure.
- Please install the windows XP first then Vista if coexisted systems required.

4.3 Installation considerations

The advantages of GTRS-18/GTS-18 Series SSD are obvious comparing to HDD. More and more users of computers replace the hard drive with GTRS-18/GTS-18 Series SSD, or planning to do so. Refer to your system's user manual for the location of the hard drive compartment and the specific instructions regarding replacement. Refer to your system manufacturer's support website for the most up-to-date information. Read and follow all instructions regarding the proper steps to be taken when replacing the system hard drive. Some mobile systems are sealed and require specialized tools to gain access to the hard drive. Special training or tools may be needed to service some mobile computers. In some cases, opening the case may void your warranty. Consult your system documentation. Memoright recommends taking your system to an authorized service technician to replace your hard drive.

Memoright GTRS-18/GTS-18 Series product specification

- Unpack the drive and keep it away from any potential ESD (Electrostatic Discharge) hazard area.
- Mount the drive with 4 screws either through the two sides of the drive or at the bottom of the drive.
- Use M3 x 6mm screws which you may find in the packing box.
- Connect the 15-Pin power cable to the power connector of the drive and connect the 7-Pin signal cable to the signal connector of the drive properly.
- Power on your host and then format the SSD or initiate the SSD through the RAID card with the standard drive format procedure.
- Please install the windows XP first then Vista if coexisted systems required.

5 SATA interface

The drive uses the industry-standard Serial ATA interface that supports 16-bit data transfers. It supports programmed input/output (PIO) modes 0–4; Ultra DMA modes 0–6. The drive also supports the use of the IORDY signal to provide reliable high-speed data transfers.


For detailed information about the Serial ATA interface, refer to the draft of AT Attachment with Packet Interface Extension (ATA/ATAPI-7), NCITS T13 1410D, subsequently referred to as the Draft ATA-7 Standard.

5.1 SATA interface signals and connector pins

The connector on Memoright SATA GTRS-18/GTS-18 Series SSD is divided into a signal Segment and a power Segment. The following table summarizes the signals on the SATA interface connector. For a detailed description of these signals, refer to the Draft ATA-7 Standard.

5.1.1 Signal Segment Pin-out Configuration

Figure 3: SATA Pin

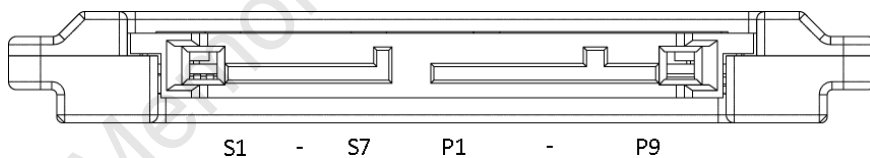

The SATA signal cable uses a protocol transmitted over a 7-pin cable. The following table lists the signal definitions of the 7-pin segment.

Table 9: SATA Connector Signal Definitions

Pin	Signal Name	Signal Definitions
S1	Ground	Second Mate
S2	R+	+Differential Receive Signal
S3	R-	-Differential Receive Signal
S4	Ground	Second Mate
S5	T-	-Differential Transmit Signal
S6	T+	+Differential Transmit Signal
S7	Ground	Second Mate

5.1.2 Power Segment Pin-out Configuration

The SATA power connector consists of 9 pins. The following table lists the signal definitions of the 9-pin segment.

Table 10: SATA Connector Power segment Definitions

Pin	Signal Name	Signal Definitions
P1	V3.3	3.3V Power
P2	V3.3	3.3V Power
P3	Ground	Ground
P4	Ground	Ground
P5	V5.0	Should be left open if 5.0V is not applied
P6	V5.0	Should be left open if 5.0V is not applied
P7	DAS	Device Active Signal
P8	OPT1	Should be left open
P9	OPT2	Should be left open

5.2 Supported ATA commands

The following table lists ATA-standard commands supported by Memoright SATA GTRS-18/GTS-18 Series SSD. For a detailed description of the ATA commands, refer to the Draft ATA-7 Standard.

Table 11: Supported ATA commands

Command name	Code (hex)
Recalibrate	10h
Read Sectors	20h
Write Sectors	30h
Read Verify Sectors	40h
Seek	70h
Execute Device Diagnostic	90h
Initialize Device Parameters	91h
S.M.A.R.T.	B0h
Read Multiple	C4h
Write Multiple	C5h
Set Multiple Mode	C6h
Read DMA	C8h
Write DMA	CAh
Read Buffer	E4h
Flush Cache	E7h
Write Buffer	E8h
Identify Device	ECh
Set Features	EFh
Power-management	
Check Power Mode	98h, E5h
Sleep	E6h
Standby Immediate	E0h
Idle Immediate	95h, E1h
Standby	E2h
Idle	97h, E3h
48 bit addressing	
Read Sector(s) EXT	24h
Read DMA EXT	25h
Read Multiple EXT	29h
Write Sector(s) EXT	34h
Write DMA EXT	35h
Write Multiple EXT	39h
Read Verify Sector(s) EXT	42h
Flush CACHE EXT	EAh

5.2.1 Recalibrate (10h)

When this command is issued, the GTRS-18/GTS-18 Series SSD sets BSY and waits for that the device is initialized, and then clears BSY.

5.2.2 Read Sector(s) (20h)

This command will read from 1 to 256 sectors as specified in the Sector Count Register. A sector count of 0 (zero) requests 256 sectors. The transfer will begin at the sector specified in the Sector Number Register.

5.2.3 Read Sector(s) EXT (24h)

This command reads from 1 to 65,536 sectors as specified in the Sector Count register. A sector count of 0000h requests 65,536 sectors. The transfer shall begin at the sector specified in the LBA Low, LBA Mid, and LBA High registers.

5.2.4 Read DMA EXT(25h)

The Read DMA EXT command allows the host to read data using the DMA data transfer protocol.

5.2.5 Read Multiple EXT(29h)

This command reads the number of sectors specified in the Sector Count register.

5.2.6 Write Sector(s) (30h)

This command will write from 1 to 256 sectors as specified in the Sector Count Register. A sector count of 0 (zero) will request 256 sectors. The transfer begins at the sector specified in the Sector Number Register.

5.2.7 Write Sector(s) EXT(34h)

This command reads the number of sectors specified in the Sector Count register.

5.2.8 Write DMA EXT(35h)

The Write DMA EXT command allows the host to write data using the DMA data transfer protocol.

5.2.9 Write Multiple EXT(39h)

This command writes the number of sectors specified in the Sector Count register.

5.2.10 Read/Verify Sector(s) (40h)

This command will verify one or more sectors by transferring data from the flash media to the data buffer and verifying the ECC is correct. The command is identical to the Read Sector(s) - 20h command except that DRQ is never set and no data is transferred to the host.

5.2.11 Read Verify Sector(s) EXT(42h)

This command is identical to the Read Sector(s) EXT command, except that the device shall have read the data from the media, the DRQ bit is never set to one, and no data is transferred to the host.

5.2.12 Seek (70h)

This command will cause the device performing a range check.

5.2.13 Execute Device Diagnostic (90h)

This command performs the internal diagnostic tests implemented by the controller.

5.2.14 Initialize Device Parameters (91h)

This command will enable the host to set the number of sectors per track and the number of heads per cylinder.

5.2.15 S.M.A.R.T (B0h)

When this command is issued, the GTRS-18/GTS-18 Series SSD will report the SMART data to Host.

5.2.16 Read Multiple (C4h)

This command is similar to the Read Sector(s) -20h command. Interrupts are not generated on each sector, but on the transfer of a block that contains the number of sectors as defined by a Set Multiple Mode - C6h command.

5.2.17 Write Multiple (C5h)

This command is similar to the Write Sector(s) - 30h command. Interrupts are not presented on each sector, but on the transfer of a block which contains the number of sectors defined by the Set Multiple Mode - C6h command.

5.2.18 Set Multiple Mode (C6h)

This command enables the SSD to perform multiple Read and Write operations and establishes the block count for these commands.

5.2.19 Read DMA (C8h)

When this command is issued, the SSD will prepare the data, and transfer the data to host via ultra DMA protocol.

5.2.20 Write DMA (CAh)

When this command is issued, the GTRS-18/GTS-18 Series SSD will prepare for receiving the data transfer from host via ultra DMA protocol.

5.2.21 Standby Immediate (E0h)

This command will cause the GTRS-18/GTS-18 Series SSD to set BSY, enter the Standby Mode, clear BSY, and return the interrupt immediately.

5.2.22 Idle immediate (E1h or 95h)

This command will cause the drive to set BSY, enter the IDLE (READ) mode, clear BSY, and generate an interrupt.

5.2.23 Standby (E2h)

This command is similar to Standby immediate.

5.2.24 Idle (E3h)

This command is similar to Idle immediate.

5.2.25 Read Buffer (E4h)

This command enables the GTRS-18/GTS-18 Series SSD to transfer the buffer data in cache.

5.2.26 Check Power (E5h or 98h)

This command enables the Host to check the GTRS-18/GTS-18 Series SSD power mode.

5.2.27 Sleep (E6h)

This command enables the Host set GTRS-18/GTS-18 Series SSD into sleep mode.

5.2.28 Flush Cache (E7h)

When this command is issued, the device will flush all data in cache into GTRS-18/GTS-18 Series SSD disk to protect the data.

5.2.29 Write Buffer (E8h)

This command enables the GTRS-18/GTS-18 Series SSD to receive the buffer data from host into cache.

5.2.30 Flush CACHE EXT(EAh)

This command is used by the host to request the device to flush the write cache. If there is data in the write cache, that data shall be written to the media. The BSY bit shall remain set to one until all data has been successfully written or an error occurs.

5.2.31 Identity Device (ECh)

The Identify Device command (command code ECh) transfers information about the drive to the host following power up. The data is organized as a single 512-byte block of data, whose contents are shown in Table 7 on page 20. All reserved bits or words should be set to zero. Parameters listed with an "x" are drive-specific or vary with the state of the drive. See Section 2.0 on page 3 for default parameter settings.

The following commands contain drive-specific features that may not be included in the Draft ATA-7 Standard.

Table 12: Drive-specific features

Word	Description	Value
0	Configuration information: Bit 15: 0=ATA; 1=ATAPI Bit 7: removable media Bit 6: removable Controller Bit 0: reserved	0040h
1	Number of logical cylinders	3FFFh
2	Specific configuration	C837h
3	Number of logical heads	0010h
4	Retired	0000h
5	Retired	0000h
6	Number of logical sectors per logical track	003Fh
7-9	Retired	0000h
10-19	Serial number: 20 ASCII characters	ASCII
20	Retired	0000h
21	Retired	0000h
22	Obsolete	0000h
23-26	Firmware revision: 8ASCII characters	ASCII
27-46	Drive model number: 40 ASCII characters	ASCII
47	(Bits 7–0) Maximum sectors per interrupt on Read multiple and Write multiple (1)	8001h
48	Reserved	0000h
49	Standard Standby timer, IORDY supported and may be disabled	2F00h
50	Capabilities	4000h
51	Retired	0000h
52	Retired	0000h
53	Words 54–58, 64–70 and 88 are valid	0007h
54	Number of current logical cylinders	XXXXh
55	Number of current logical heads	XXXXh
56	Number of current logical sectors per logical track	XXXXh
57-58	Current capacity in sectors	XXXXh
59	Multiple sector setting	0101h
60-61	Total number of user address sectors(LBA mode)	XXXX XXXXh
62	Obsolete	0000h
63	Multi-word DMA transfer(Not support)	0000h
64	Flow control PIO transfer modes supported	0003h
65	Minimum Multiword DMA transfer cycle time per word	0078h
66	Manufacturer’s recommended Multiword DMA transfer cycle time per word	0078h
67	Minimum PIO transfer cycle time without flow control	0078h
68	Minimum PIO transfer cycle time with IORDY flow control	0078h
69-74	Reserved	0000h
75	No DMA QUEUED command supports	0000h
76-79	Reserved	0000h
80-81	ATA Ver support (ATA/ATAPI-7 T13 1532D revision 4a)	00FE 0021h
82	Command set supported 15 0 = Obsolete	786Bh

Memoright GTRS-18/GTS-18 Series product specification

	<p>14 1 = NOP Command supported 13 1 = READ BUFFER Command supported 12 1 = WRITE BUFFER Command supported 11 1 = Obsolete 10 0 = Host Protected Area Feature Set not supported 09 0 = DEVICE RESET Command not supported 08 0 = SERVICE Interrupt not supported 07 0 = RELEASE Interrupt not supported 06 1 = Look Ahead supported 05 1 = Write Cache supported 04 0 = indicate that the PACKET feature set not supported 03 1 = Power Management Feature Set supported (mandatory) 02 0 = Removable Media feature set not supported 01 1 = Security Mode Feature Set supported 00 1 = SMART Feature Set supported</p>	
83	<p>Command set supported 15 Shall be cleared to zero 14 Shall be set to one 13 0 = FLUSH CACHE EXT Command not supported 12 1 = FLUSH CACHE Command supported (mandatory) 11 0 = Device Configuration Overlay feature set not supported 10 1/0 = 48-Bit Address feature set supported /not supported 09 0 = Automatic Acoustic Management feature set not supported 08 0 = SET MAX security extension not supported 07 0 = See Address Offset Reserved Area Boot, INCITS TR27:2001 06 0 = SET FEATURES subcommand not required to spin-up after power-up 05 1 = Power-Up in Standby feature set supported 04 0 = Obsolete 03 1 = Advanced Power Management feature set supported 02 0 = CFA feature set not supported 01 0 = READ/WRITE DMA QUEUED not supported 00 0 = DOWNLOAD MICROCODE Command not supported</p>	5028h/5428h
84	<p>Command Set/Feature Supported Extension 15 Shall be cleared to zero 14 Shall be set to one 13 0 = IDLE IMMEDIATE with UNLOAD FEATURE not supported 12 0 = Reserved 11 0 = Reserved 10:9 0 = Obsolete 08 0 = 64-Bit World Wide Name not supported 07 0 = Write DMA QUEUED FUA EXT Command not supported 06 0 = Write DMA FUA EXT and WRITE MULTIPLE FUA EXT commands not supported 05 0 = General Purpose Logging feature set not supported 04 0 = Streaming feature set not supported 03 0 = Media Card Pass Through Command feature set not supported 02 0 = Media Serial Number not supported 01 1 = SMART Self-Test supported 00 1 = SMART Error-Logging supported</p>	4003h
85	<p>Command set/feature enabled 15 0 = Obsolete 14 1 = NOP Command enabled 13 1 = READ BUFFER Command enabled 12 1 = WRITE BUFFER Command enabled 11 1 = Obsolete</p>	7869h

Memoright GTRS-18/GTS-18 Series product specification

	<p>10 0 = Host Protected Area has not been established 09 0 = DEVICE RESET Command not enabled 08 0 = SERVICE Interrupt not enabled 07 0 = RELEASE Interrupt not enabled 06 1 = Look Ahead enabled 05 1 = Write Cache enabled 04 0 = indicate that the PACKET feature is not supported. 03 1 = Power Management Feature Set enabled 02 0 = Obsolete 01 0 = Security Mode Feature Set enabled 00 1 = SMART Feature Set enabled</p>	
86	<p>Command set/feature enabled 15 0 = Reserved 14 0 = Reserved 13 0 = FLUSH CACHE EXT Command not supported 12 1 = FLUSH CACHE Command supported 11 0 = Device Configuration Overlay not supported 10 1/0 = 48-Bit Address features set supported/not supported 09 0 = Automatic Acoustic Management feature set not enabled 08 0 = SET MAX security extension not enabled by SET MAX SETPASSWORD 07 0 = Reserved 06 0 = SET FEATURES subcommand required to spin-up after power-up not enabled 05 0 = Power-Up in Standby feature set not enabled 04 0 = Obsolete 03 1 = Advanced Power Management feature set enabled 02 0 = CFA feature set not supported 01 0 = READ/WRITE DMA QUEUED Command not supported 00 0 = DOWNLOAD MICROCODE Command not supported</p>	1008h/1408h
87	<p>Command set/feature default 15 Shall be cleared to zero 14 Shall be set to one 13 1 = IDLE IMMEDIATE with UNLOAD FEATURE supported 12 0 = Reserved for Technical Report, INCITS TR-37-2004 (TLC) 11 0 = Reserved for Technical Report, INCITS TR-37-2004 (TLC) 10:9 0 = Obsolete 08 0 = 64-Bit World Wide Name not supported 07 0 = WRITE DMA QUEUED FUA EXT Command not supported 06 0 = WRITE DMA FUA EXT and WRITE MULTIPLE FUA EXT commands not supported 05 0 = General Purpose Logging feature set not supported 04 0 = Obsolete 03 0 = Media Card Pass Through Command feature set not supported 02 0 = Media Serial Number is not valid 01 1 = SMART Self-Test supported 00 1 = SMART Error-Logging supported</p>	4003h
88	Ultra DMA modes	007Fh
89	Time required for security erase unit completion	XXXXh
90	Time required for Enhanced security erase unit completion(Not support)	0000h
91	Current advanced power management value	4080h
92	Master Password Revision Code	FFFEh
93	Hardware reset result	600Bh
94-99	Reserved	0000h

100-103	Maximum user LBA for 48-bit Address feature set	XXXXh
104-126	Reserved	0000h
127	Removable Media Status Notification feature set support	0000h
128	Security Status	0001h
129-159	Vendor specific	0000h
160	CFA power mode 1(Not support)	0000h
161-175	Reserved	0000h
176-205	Current media serial number	0000h
206-254	Reserved	0000h
255	Checksum	XXXXh

5.2.32 Set Features (EFh)

This command is used by the host to establish or select certain features.

5.2.33 Set Features command

This command controls the implementation of various features that the drive supports. When the drive receives this command, it sets BSY, checks the contents of the Features register, clears BSY and generates an interrupt. If the value in the register does not represent a feature that the drive supports, the command is aborted. Power-on default has the read look-ahead and writes caching features enabled. The acceptable values for the Features register are defined as follows:

Table 13: Set features description

Value	Description
01h	Reserved
02h	Enable write cache
03h	Set transfer mode based on value in Sector Count register
04h	Obsolete
05h	Enable advanced power management
06h	Enable Power-Up In Standby feature set.
07h	Power-Up In Standby feature set device spin-up
09h	Reserved
0Ah	Reserved
10h	Reserved for Serial ATA
20h	Reserved
21h	Reserved
31h	Reserved
33h	Obsolete
42h	Reserved
43h	Reserved
44h	Obsolete
54h	Obsolete
55h	Disable read look-ahead feature
5Dh	Reserved
5Eh	Reserved
66h	Disable reverting to power-on defaults
77h	Obsolete
81h	Reserved
82h	Disable write cache
84h	Obsolete
85h	Disable advanced power management
86h	Disable Power-Up In Standby feature set
88h	Obsolete
89h	Reserved
8Ah	Reserved
90h	Reserved for Serial ATA
95h	Reserved
99h	Obsolete
9Ah	Obsolete
AAh	Enable read look-ahead feature
ABh	Obsolete
BBh	Obsolete
C2h	Reserved
CCh	Enable reverting to power-on defaults
DDh	Reserved
DEh	Reserved
E0h	Obsolete
F0-FFh	Reserved

Sales and technical support

For data sheet, documentation, customization for specific application and technical support, please contact Memoright SSD Design Center

Memoright Corporation
9F, 535, Zhong Zheng Rd, Xin Dian Dist.,
New Taipei City, Taiwan

Tel: +886-2-2218-3789
Fax: +886-2-2218-5155
E-Mail: sales@memoright.com
Web: <http://www.memoright.com>

Memoright confidential