


Industrial 2.5" form-factor 40/44-pin IDE to CF card adapter

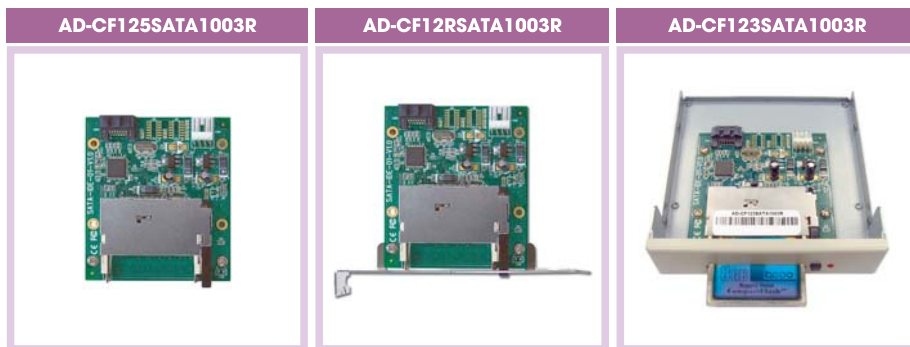

Common Specifications:

❖ SATA / ATA standard	Compliant with serial ATA 1.0a specification Compliant with ultra ATA 133 Integrated serial ATA link and PHY logic
❖ Form-factor	2.5" form-factor with 4 standard 2.5" HDD fixed holes Optional with rear bracket Optional with 3.5" floppy size casing
❖ Host interface	SATA 7-pin female connector Serial ATA to parallel ATA device
❖ CF Socket	CompactFlash type II socket with ejector
❖ Power Connector	4-pin floppy power connector
❖ Support Card Types	CompactFlash card type I/II and MicroDrive
❖ Data Transfer Mode	Support DMA mode and up to UDMA-4 mode
❖ Performance	Support SATA generation 1 with transfer rate 1.5Gb/sec
❖ LED Indicator	Optional for special request, 1 access LED and 1 active LED
❖ Bootable / Hot Swappable	Yes / No
❖ Operation Voltage	+5V
❖ Supported OS	Compatible with DOS, Windows 3.1/ NT4/98SE/ME/ 2000/XP and Linux
❖ Dimension (W*L*H)	With or without bracket: 70.0mm * 79.7mm * 10.7mm 3.5" Drive Bay: 101.6mm * 109.6mm * 25.4mm
❖ Weight	Without bracket: 30g / 1.06oz With bracket: 35g / 1.23oz 3.5" drive bay : 250 g / 8.82oz
❖ Warranty	1 year warranty

Part Number List

AD-CF125SATA1003R	Industrial 2.5" SATA to CF adapter
AD-CF12RSATA1003R	Industrial 2.5" SATA to CF adapter with rear bracket
AD-CF123SATA1003R	Industrial 2.5" SATA to CF adapter with standard 3.5" drive bay

INDUSTRIAL
CompactFlash Card

INDUSTRIAL
PCMCIA ATA Card

INDUSTRIAL
micro IDE Flash Disk

INDUSTRIAL
micro SATA Flash Disk

INDUSTRIAL
Solid State Disk

INDUSTRIAL
USB Flash Disk

INDUSTRIAL
Adapters
Card Reader